

#### Parts and Pieces that come with the Rail Installation Pack



8 Pieces of 16mm Button Head Socket Cap Screws, Stainless Steel 18-8 (304), Black Finish, for Aluminum Profile of L-Bracket to T-Bar



8 Pieces of T Sliding Nuts Hammer Nut Block Square Nuts M5 T Nuts for Aluminum Profiles of L-Bracket to T-Bar



8 Pieces of Wood Screws 3/4 Inch, Premium Flat Head Phillips Black Wood Screws, Self Tapping Electrophoresis Used in Indoor Furniture, Woodworking (#8 x 3/4") For screwing the L-Bracket into cabinet wall.



2 Pieces of 22" Miter T Track



4 Pieces of 11" T-Bar with Designated holes for L-Bracket assembly



4 x Corner Bracket 78x78mm for Aluminum Extrusion Profile, 4 Hole Inside Strong Support Corner Brackets




### IMPORTANT NOTES FOR PROPER INSTALLATION BY GUIDANCE OF PORCELAIN MANUFACTURES

• Burners are to be a **minimum of 25cm or 8.75" Inches** away from any open ends or Edges of the Countertop Material. This means that from the outside Edge of the Unit (Back part of the Lip) should be a Minimum of 9cm or 3.5" Inches away from any countertop Edge.

#### \*\*See diagram below \* \*

 All corners are to be round edges as instructed by the Materials Specification for the Porcelain fabricated slabs.

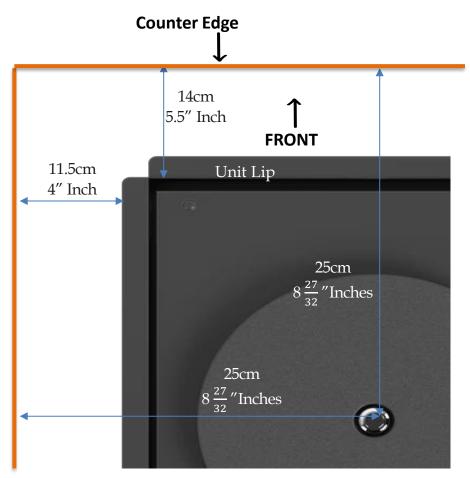


#### Minimum Dimensions to Counter Edge

Measurements to front of unit, for Back and Sides, make sure to see next pages, with countertop depth and width minimum requirements.

Invisacook can only be used with a minimum countertop ickness of 12mm (1/2") and Max thickness of 20mm (2cm) (3/4") Countertops from tested and approved brands





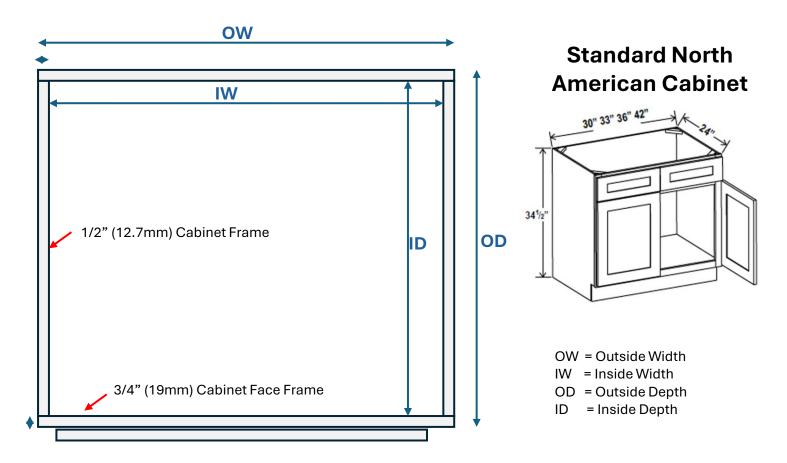

Can be adjusted to fit within a Width Cabinet of 24", 28", 30", 34", 36", 38", 40", & 42" cabinet base.

5 Burner in a 38", 40" or 42" Cabinet bases

4 Burner in Row in a 38", 40", & 42"Cabinet bases

4 Burner in a 24", 28", 30", 34", 36", 38", 40", & 42" Cabinet Bases

3 Burner in a 32", 34", 36", 38", 40", & 42" Cabinet Bases

2 Burner in a 24", 28", 30" & 34" cabinet base

For Cabinets of 20", 18", 16" & 14", which only applies for the 1 and 2 Burner units, these braces will be installed Vertically in any of these 24" deep cabine bases

2 Burner in a 20", 18", 16" & 14" Cabinet Base


1 Burner in a 20", 18", 16" & 14" Cabinet Bases




## 5 Burner 220V

8150-256-001B



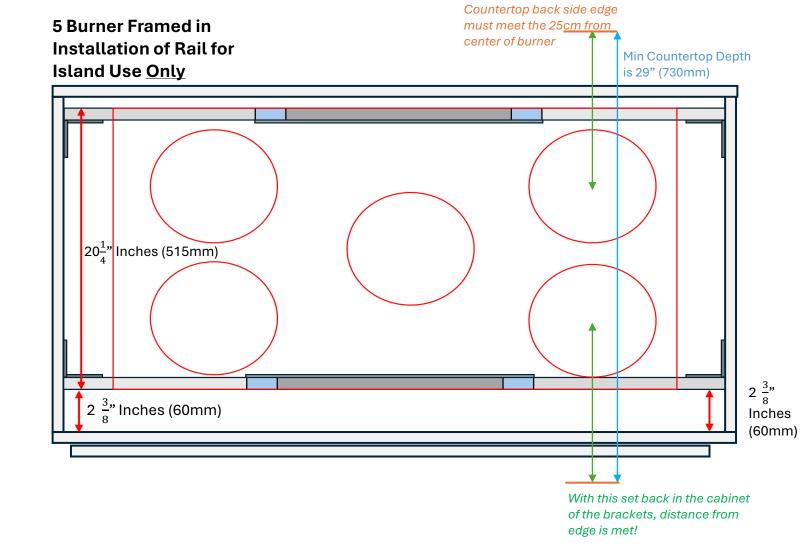

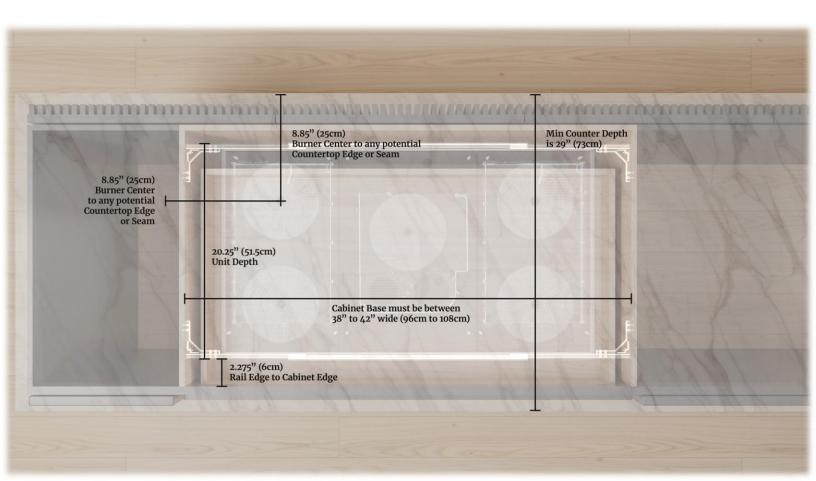




# 4 Burner Squared 220V

8140-257-001B



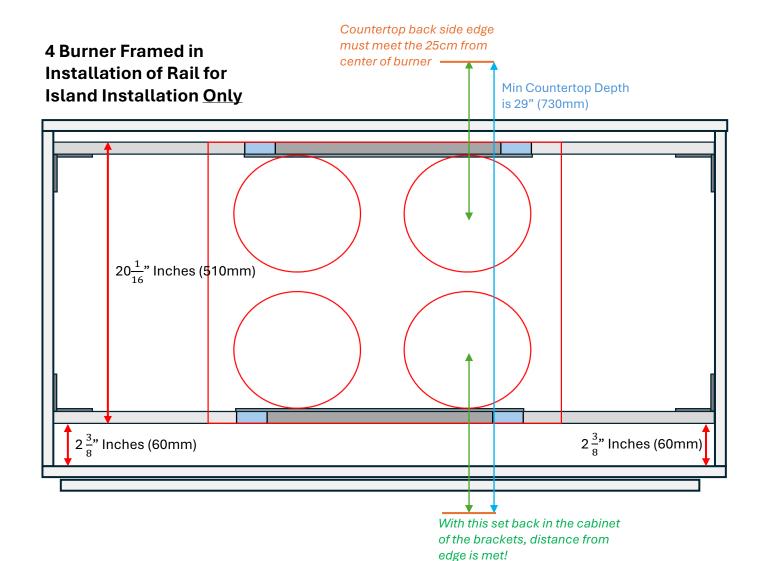






# 4 Burner Galley 220V


8145-257-001B



## 4 Burner Straight Row, Framed in Installation of Rail in Galley Kitchen Use or Island

Countertop back side edge must meet the 25cm from center of burner

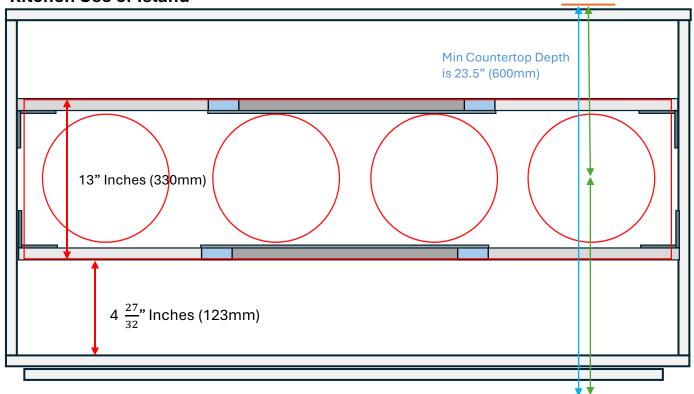

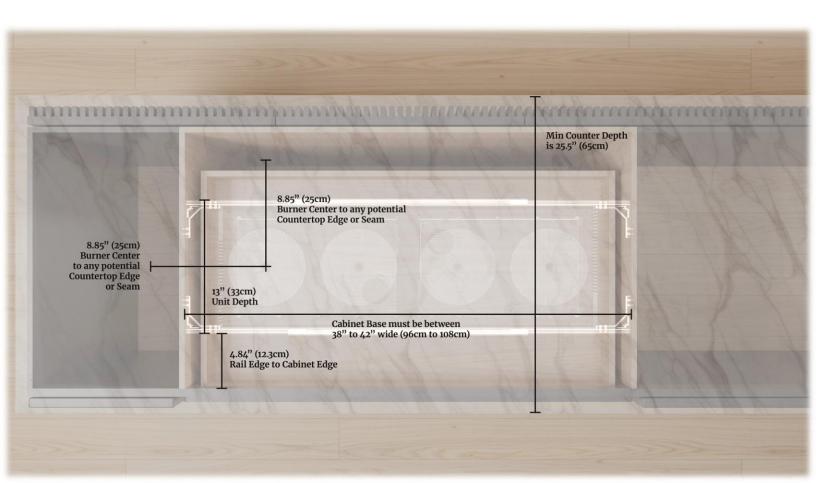




## 3 Burner 220V


8134-256-001B



#### 3 Burner Framed in Installation of Rail in a Galley Kitchen

Countertop back side edge must meet the 25cm from

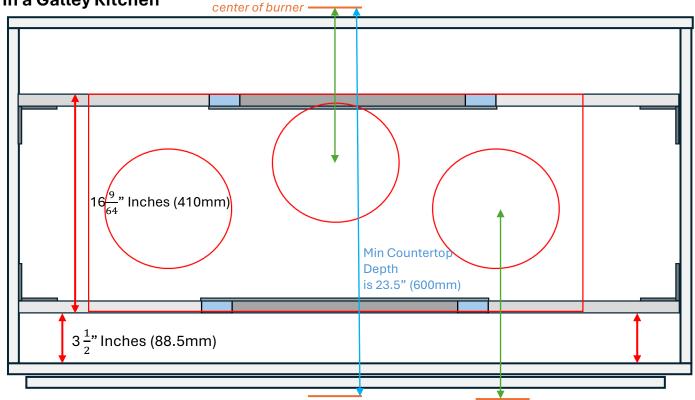

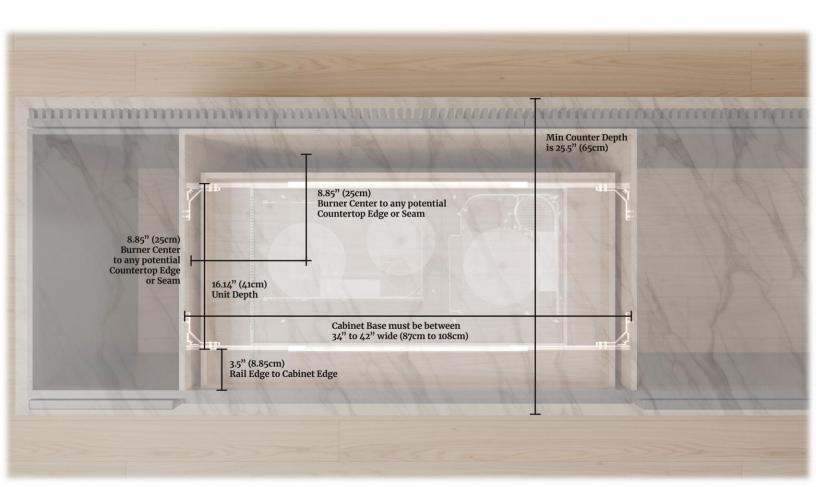





# 2 Burner 110V or 220V

8121-257-001B




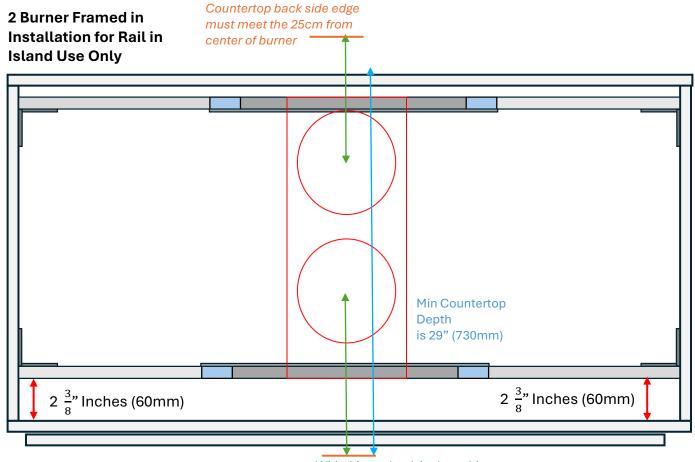


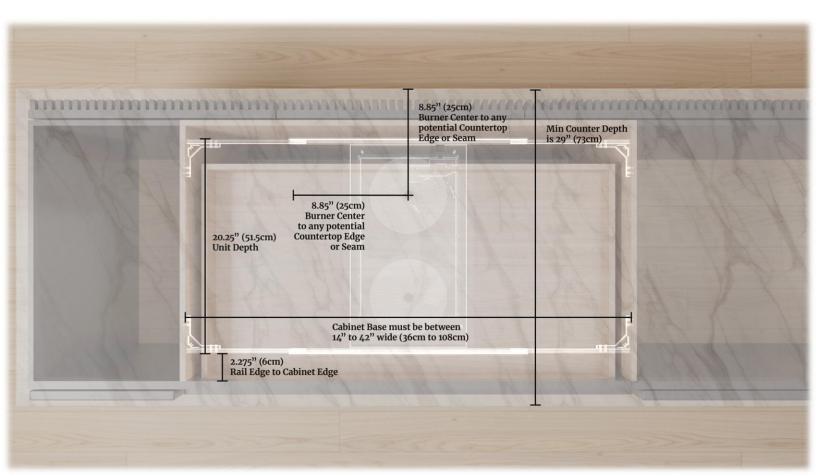



Countertop back side edge must meet the 25cm from center of burner

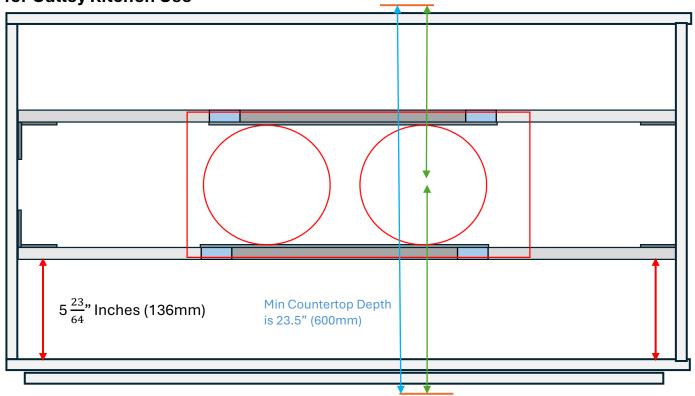

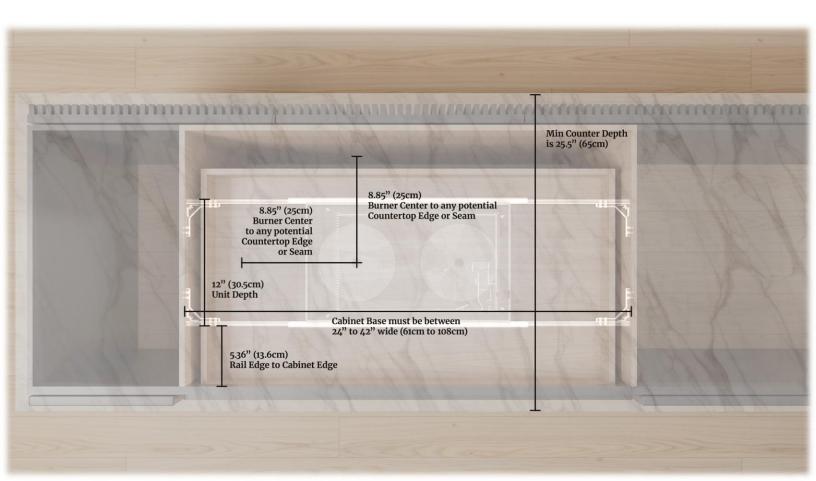




# 1 Burner 110V or 220V


8113-256-001B



1 Burner Framed in Installation of Rail System for Galley Kitchen

Countertop back side edge must meet the 25cm from center of burner

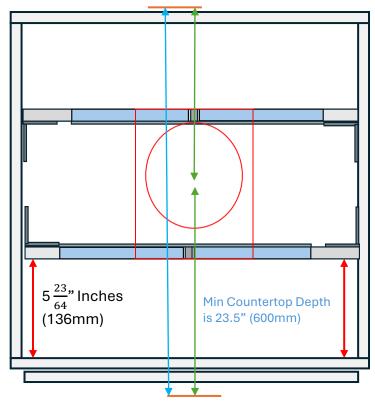

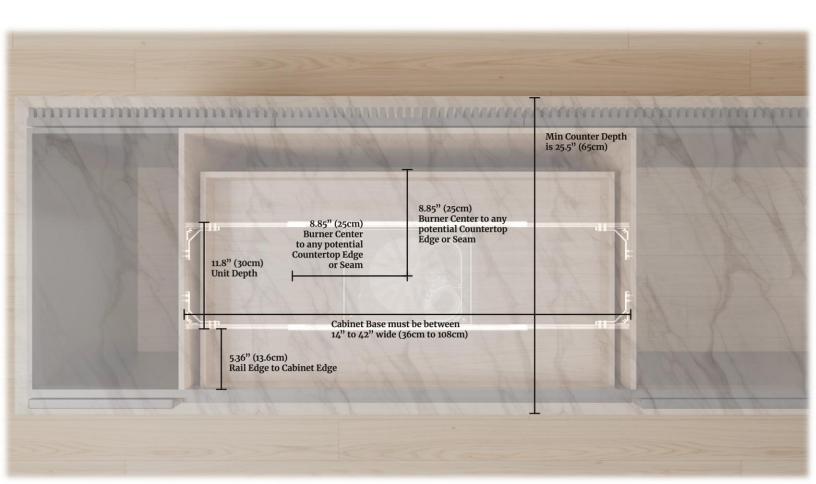

### 1 & 2 Burner Framed in Installation for Rail in Cabinets smaller then 22" much be installed Vertical

